




RC-2 Complete T-2 generic system

Compact console with 8 spring-to-center toggle switches

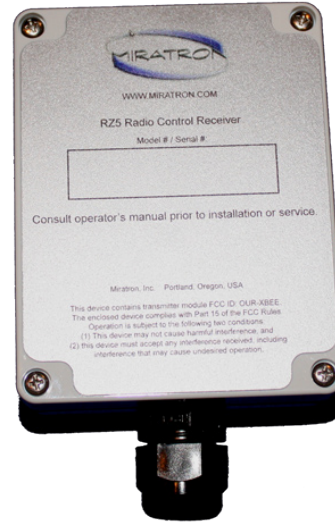

OPERATION

Radio Operation

Outdoor range of 500 feet or more. Frequency hopping spread spectrum (FHSS) transceiver uses two-way communication for maximum reliability and safety. Operates on 2.4-2.4835GHz (International) unlicensed ISM band. No end-user license required.

Controls

Features 8 spring-to-center toggle switches for on/off control. Receiver has 16 high-capacity outputs to drive solenoid valves directly.

Transmitter Matching

Transmitters are matched to a receiver by pressing the learn button on the receiver. Matching the transmitter to the receiver prevents cross communication in applications where multiple radios are in use. This feature also allows the transmitter to be replaced without changing the receiver.

Batteries

Operates from 4 x "AA" cell batteries. Rechargeable types can also be used. Batteries are easily accessible.

ORDERING INFORMATION

PART #	DESCRIPTION
RC-2	Complete T-2 compact console system. System includes: Transmitter, Receiver, Label Sheet.

For customized versions, please call or visit our website.

FEATURES

- **Complete System - Ready to use**
System includes belly-pack T-2 transmitter, receiver, and label sheet of popular functions for user customization.
- **Rugged Construction**
Environmentally sealed for harsh off-highway applications. Includes neck and waist straps.
- **License Free**
Pre-certified FCC - no license required.
- **Long-Range Reliability**
Up to 500 feet+ range (line of sight). Monitored radio link keeps equipment under control.
- **Standard Batteries**
Operates from standard AA" cell alkaline or rechargeable batteries. No downtime waiting for specialty battery packs to charge.

APPLICATIONS

- Rock Crushers
- Wood chippers and grinders
- Track vehicles
- Winch systems
- Specialty off-highway equipment

SPECIFICATIONS

T-2 TRANSMITTER

Frequency	2.4-2.4835GHz, Unlicensed ISM band
Type	Frequency hopping spread spectrum
Frequency Control	Direct FM
FCC id	OURXBEE
Range (line of sight)	500 feet
RF Power Output	60mW (100mW EIRP)
Battery Type	4 "AA" size alkaline or rechargeable
Battery Life (Alkaline)	Standby, 40 hrs; Transmit, 16 hrs
Controls	8 spring-to-center toggles for functions, plus transmitter power switch
Led Indicator	Flashing = normal; Double blink = battery low
Enclosure	Compact Console High-impact PC/ABS Approximate size: 7" L x 3-1/2"W x 4-1/4"D including rails
Sealing	IP65
Environmental	Storage -40°C to 85°C Operating -25°C to 60°C

R-5 RECEIVER

General

Power Requirement	12vdc, 100mA nominal + power to loads
Fuses	15-amp mini blade fuse

Radio

Frequency	2.4-2.4835GHz, Unlicensed ISM band
RF Connector	BNC
Outputs	16 Solid state 10-amp sourcing
Field Wiring	Internal, eurostyle cage clamp terminals Water resistant cable gland for wire entry Jacketed cable recommended

Enclosure

Enclosure	ABS, NEMA 4X Approximate size: 4.53" L (+1.2" cable gland) x 3.54"W x 2.17"D
-----------	---

Environmental

Storage	-40°C to 85°C
Operating	-40°C to 60°C