



Compact Keyfob Transmitters

Low-Cost keyfob transmitters with configurable options.


KF "Classic" Style



MF "Modern" Style



ORDERING INFORMATION

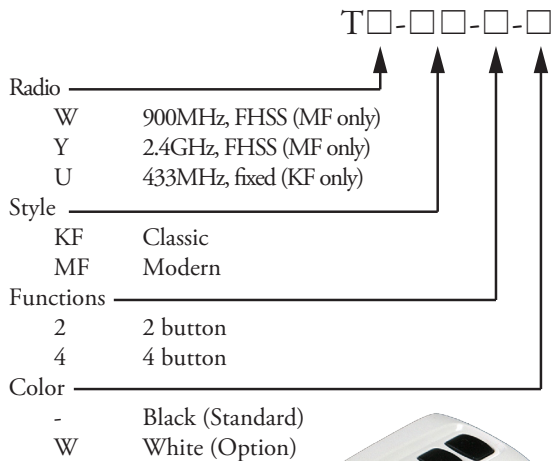

FEATURES

- **Compact Size**
Classic and modern style options.
- **Configurable Options**
Standard 2 and 4 button models stocked in black. Other button configurations and colors available as special order.
- **Replaceable Battery**
Operates from a single commonly available CR2032 coin cell.
- **Reliable Communication**
2.4GHz and 900MHz models for long-range frequency hopping reliability. 433Mhz fixed frequency version also available.
- **Cost Effective**
Value priced. Compatible with economical RM-20 series receivers.

SPECIFICATIONS

	Battery	CR2032, 3v Lithium 20mm coin cell
Functions	KF2 and MF2	2 Buttons
	KF4 and MF4	4 Buttons
	1, 3, or 5 button options available as special order. Consult factory for availability.	
Frequency/Range	TW	900MHz, FHSS / 250-500' Outdoor Line of Sight
	TY	2.4GHz, FHSS / 100-300' Outdoor Line of Sight
	TU	433MHz, Fixed / 50-100' Outdoor Line of Sight
Environmental Enclosure	Splash resistant. Not submersible.	
	Thermoplastic, with silicon buttons	



Compact Keyfob Receivers


Low-Cost receivers for keyfob transmitters.




FEATURES

- **Compact Size**
Compact design with mounting tabs integrates easily into control panels.
- **Solid-State Outputs**
4 x digital on/off outputs up to 3-amps each.
- **External antenna**
Replaceable "stubby" antenna for maximum range. Other antenna options also available including cabled versions.
- **Reliable communication**
2.4GHz and 900MHz models compatible with MF series keyfobs. 433MHz fixed frequency version for KF series keyfobs.
- **Cost Effective**
Value priced, simple receiver for controlling up to four loads.

ORDERING INFORMATION

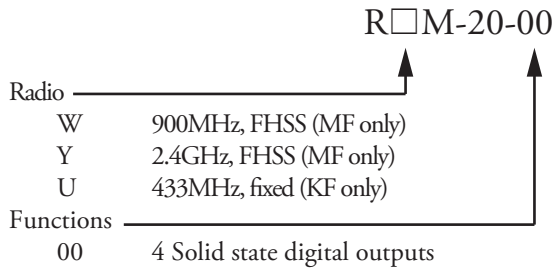

WIRING

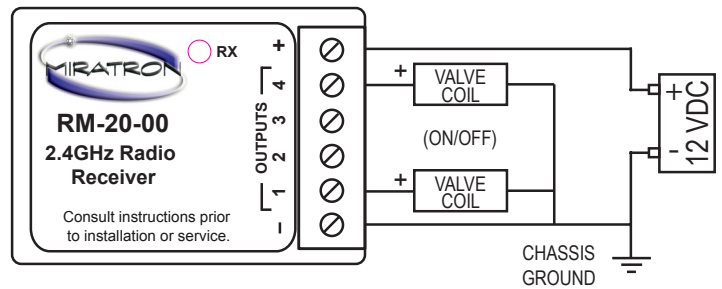

SPECIFICATIONS

Power	Power Supply	12 to 24 VDC, 100mA max. plus load current
Outputs	RM20	4 outputs. 3 amps max. per channel, 7 amps max total
Frequency/Range	RWM-20	900MHz, FHSS / 250-500' Outdoor Line of Sight
	RYM-20	2.4GHz, FHSS / 100-300' Outdoor Line of Sight
	RUM-20	433MHz, Fixed / 50-100' Outdoor Line of Sight
Enclosure	Thermoplastic, 3" w x 2.75" h x 1" d, with molded-in mounting brackets	